


7" 4K HDMI input and output full HD on-camera monitor



Main body Dimensions

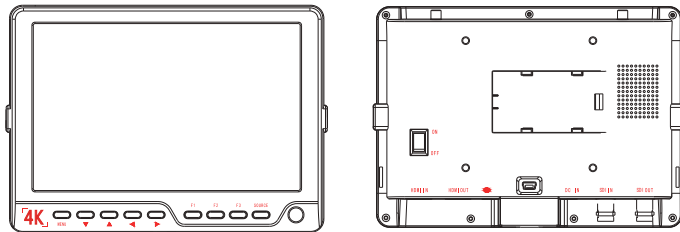

Screen Parameters

Screen Size	7 inch
Resolution	1920*1200
Display area	149.76(W) ×93.6(H)mm
Contrast Ratio	1100:1
Brightness	450nits
Visual Angle	178°(H/V)
Backlight	LED



The Desview S7II use full HD 1920*1200 IPS display panel, support 4k HDMI input and output/3G-SDI input and output. This monitor features a series of professional functions such as histogram, peaking, zebra, false color...

Product Highlights

- 7" full HD 1920*1200 IPS display
- HDMI and composite in/out
- 450cd/m2 brightness
- 178/178 wide viewing angle
- Battery power supply and power adapter supply
- Waveform/histogram/audio table
- Peaking/false color/zebra
- Equipped sun hood and sun frame

Signal Interface

Input	
HDMI1.4	3G-SDI
Output	
HDMI1.4	3G-SDI
Audio Input / Output	
Speaker out x2	3.5mm Headphone Jack







Signal Format

HDMI	720*480i&720*480p@59.94, 60Hz 720*576i & 720*576p@50Hz 1280*720p@50, 59.94, 60Hz 1920*1080i@50, 59.94, 60Hz 1920*1080PsF@24, 25, 29.97, 30Hz 1920*1080p@23.93, 24, 25, 29.97,30,50,59.94,60Hz 3840*2160p@24,25,30Hz 4096*2160P@24Hz
3G-SDI	720*480i @59.94, 60Hz 720*576i @50Hz 1280*720P@ 50, 59.94, 60Hz 1920*1080i @ 50, 59.94, 60Hz 1920*1080p@ 24, 25, 29.97, 30Hz 1920*1080p @23.93, 24, 25, 29.97,30,50,59.94,60Hz

Other Parameters

Size	180*130*26mm
Texture	ABS Engineering Plastic
Input Voltage	DC7-24V
Power Dissipation	≤9W

Standard accessories

 SUN HOOD	 SUN SHADE	 BALL HEAD	 VELVET BAG
 HDMI CABLE (A/C)	 WIPE CLOTH		