

PRODUCT DATASHEET

FLOODLIGHT LED 150 W 4000 K BK

LEDVANCE FLOODLIGHT LED | LED floodlight luminaires



Areas of application

- Replacement for floodlights with halogen lamps
- Car parks and underpasses
- Garages
- Public areas
- Building facades
- Construction areas

Product benefits

- Energy savings of up to 90 % compared to halogen lamp floodlights
- Optimized weight and size due to compact design
- Very homogenous light

Product features

- Luminaire efficacy: up to 100 lm/W
- Beam angle: 100°
- Type of protection: IP65

TECHNICAL DATA**Electrical data**

Nominal wattage	150.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	652 mA
Protection class	I
Operating mode	Electronic control gear (ECG)


Photometrical data

Luminous flux	15000 lm
Luminous efficacy	100 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	≤5 sdc _m
Photobiological safety group acc. to EN62778	RG0
Beam angle	100 °

0.5	1.19 1.15	E(0°) 24979 E(C90) 49.9° 3386 E(C0) 49.0° 3527
1.0	2.38 2.30	E(0°) 6245 E(C90) 49.9° 847 E(C0) 49.0° 882
1.5	3.56 3.45	E(0°) 2775 E(C90) 49.9° 376 E(C0) 49.0° 392
2.0	4.75 4.60	E(0°) 1561 E(C90) 49.9° 212 E(C0) 49.0° 220
2.5	5.94 5.75	E(0°) 999 E(C90) 49.9° 135 E(C0) 49.0° 141
3.0	7.13 6.90	E(0°) 694 E(C90) 49.9° 94 E(C0) 49.0° 98
Distance [m]	Cone diameter [m]	Illuminance [lx]

— C0/C180 (Half beam angle [°]: 98.0°)
— C90/C270 (Half beam angle [°]: 99.8°)


LDC typ cone

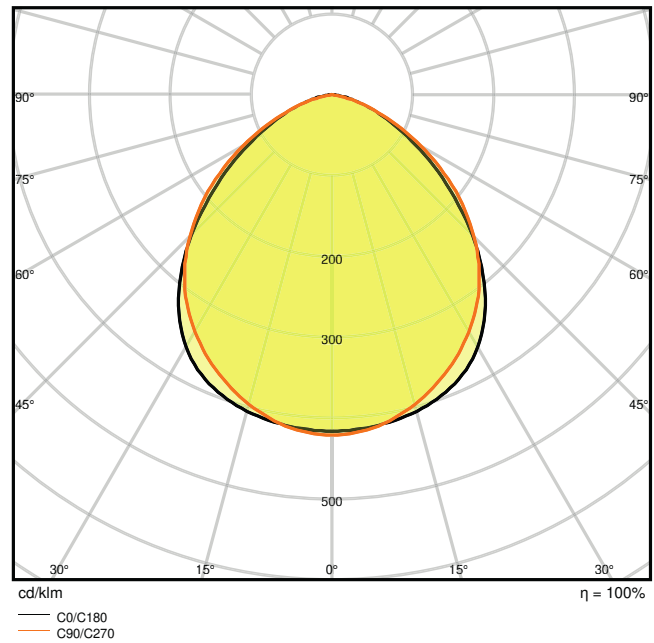

LDC typ polar

Dimensions & Weight

Length	269.00 mm
Width	298.00 mm
Height	128.00 mm
Product weight	5500.00 g
Cable length	1000 mm



Materials & Colors

Product color	Black
Housing color	Black
Body material	Aluminum
Light emitting surface material	Glass
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+50 °C
Type of connection	Cable, 3-pole
Type of protection	IP65
Protection class IK (shock resistance)	IK08
Dimmable	No
Mounting type	Surface
Mounting location	Wall / Floor
Application environment	Outdoor
LED module replaceable	Not replaceable





Lifespan

Lifespan L70/B50 at 25 °C	50000 h
Lifespan L80/B10 at 25 °C	30000 h
Lifespan L90/B10 at 25 °C	15000 h
Number of switching cycles	30000

Certificates & Standards

Standards	CE / CB / TÜV SÜD / EAC / RoHS
-----------	--------------------------------

DOWNLOAD DATA

DOWNLOAD DATA	
	Declarations Of Conformity CE
	On-Pack-Info
	IES file (IES)
	LDT file (Eulumdat)

DOWNLOAD DATA



UGR file (UGR table)

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075001176	Shipping box 1	378 mm x 323 mm x 172 mm	5739.00 g	21.00 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.